


PCIe-GPS

FEATURES

- Synchronizes PC to ± 2 milliseconds of GPS reference
- Provides millisecond accuracy to Windows applications
- Microsecond accuracy achievable through API development
- Fully configurable time zone and daylight saving time offsets
- PCIe revision 2.0 – slot compatible X1 through X16
- LED status indicator

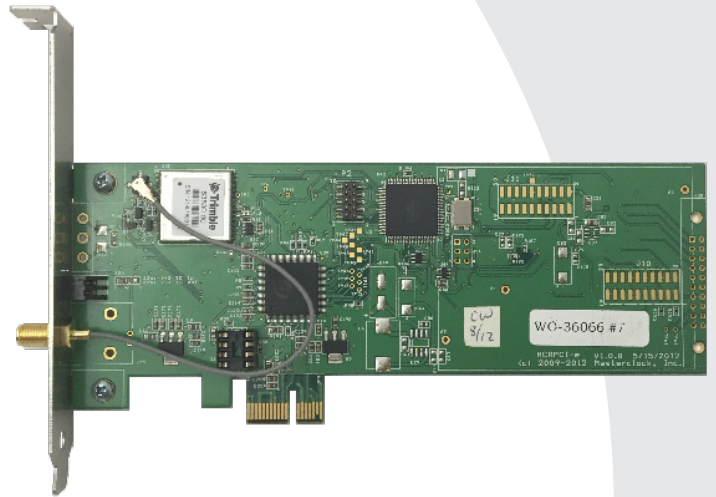

SPECIFICATIONS

Holdover Accuracy

- > With loss of power or time reference synchronization, device reverts to an internal battery-backed real-time clock chip with accuracy of ± 1 min/year

Software

- > Runs under Windows Server 2003/2008 R2/2012 R2, Win XP 32 bit, Win 7/8/10 32 & 64 bit
- > API software development kit and documentation is provided for designers

Physical

- > Length: 6.6 in (167.6 mm), Height: 2.712 in (68.8 mm)
- > Low profile card and bracket standard
- > Full height bracket included

Operating Parameters

- > Temperature: 0 to 60 °C

Compliance

- > FCC, CE Marked, ROHS, ANSI

Antenna Options

- > Basic antenna package includes magnetic GPS antenna and 15 ft (5 m) of cable
- > Standard antenna package includes outdoor GPS antenna, mounting kit, and 50 ft (15 m) of cable

High-stability Oscillator Options

- > HSO-1 with TCXO provides accuracy of ± 3 seconds/year
- > HSO-2 with OCXO provides typical stability of ± 250 ms/year after 30 days of aging

Freq = 10 Mhz	HSO-1	HSO-2
Oscillator Type	TCXO	OCXO
Freq. Stability	$\pm 2.5 \times 10^{-6}$	$\pm 5 \times 10^{-9}$
Aging Stability per yr	$\pm 1 \times 10^{-6}$	$\pm 1 \times 10^{-8}$
Drift per year	± 3 seconds	± 0.3 seconds

Authorized Distributor

5-YEAR LIMITED PARTS & LABOR WARRANTY

MADE IN THE USA



phone:
01488 638 881

email:
sales@bsgcomms.co.uk

online:
www.bsgcomms.co.uk